



สวิตช์กดชนิดกันน้ำ, กันน้ำมัน, กันฝุ่น IP 65 IEC144

The contact block of this series is standard

MODEL DESIGNATION



It must use transparent button to have marking printing on buttons. The colors can be distinguished by using different color guard ring.

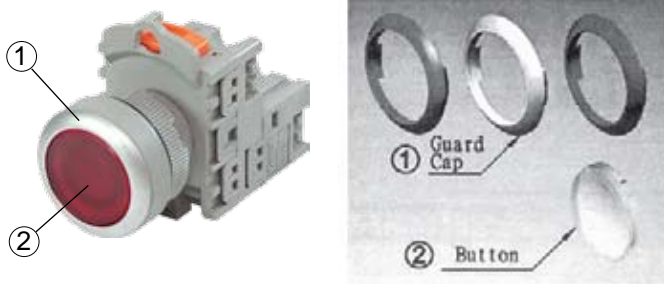

Designation	Signal	Description
1. Mounting Hole	TN2	Ø22 mm/ Ø25 mm
	TN3	Ø30 mm
2. Type	BF	Flat Head
	BL	Long Head
	BM	Mushroom Head
	BA	Long Head(Alternate)
	BK	Push-Lock
	BP	Push-Pull
	BT	Twin-Touch ♦
3. Lens Color	R	Red
	G	Green
	O	Yellow
	W	White
	B	Black
4. NO. of contact Fitted	1	1
	2	2
	3	3
	4	4
5. Type of contact Block Fitted	A	1a
	B	1b
	C	1a1b

♦ Only used with AB contact

OPERATING HEAD DIMENSIONS

TN2BF สวิตช์กดหัวเรียบ 22/25 มม.



TN2BF -1A, 1B @ n/a
 TN2BF-1C @ n/a
 TN2BF-1AB @ n/a

TN3BF สวิตช์กดหัวเรียบ 30 มม.



TN3BF-1A, 1B @ n/a
 TN3BF-1C @ n/a
 TN3BF-1AB @ n/a

TN2BL สวิตช์กดหัวนูน 22/25 มม.



TN2BL -1A, 1B @ n/a
 TN2BL-1C @ n/a
 TN2BL-1AB @ n/a

TN3BL สวิตช์กดหัวนูน 30 มม.



TN3BL-1A, 1B @ n/a
 TN3BL-1C @ n/a
 TN3BL-1AB @ n/a

TN2BM สวิตช์กดหัวเห็ด 22/25 มม.



TN2BM-1A, 1B @ n/a
 TN2BM-1C @ n/a
 TN2BM-1AB @ n/a

TN3BM สวิตช์กดหัวเห็ด 30 มม.



TN3BM-1A, 1B @ n/a
 TN3BM-1C @ n/a
 TN3BM-1AB @ n/a

TN2BA สวิตช์กดจมหัวนูน 22/25 มม.



TN2BA-1A, 1B @ n/a
 TN2BA-1C @ n/a
 TN2BA-1AB @ n/a

TN3BA สวิตช์กดจมหัวนูน 30 มม.



TN3BA-1A, 1B @ n/a
 TN3BA-1C @ n/a
 TN3BA-1AB @ n/a