


■ MODEL DESIGNATIONS



Designation	Signal	Description
1. Mounting Hole	TS2	φ22 mm / φ25 mm
2. Type	SS	Knob Operator
3. Positions	1	90°x 2 Position
	2	45°x 2 3 Position
	3	45°x 2 3 Position Spring return from right
	4	45°x 2 3 Position Spring return from left
	5	45°x 2 3 Position 2-Way Spring return


Designation	Signal	Description	
4. Lens Color	R	Red	
	G	Green	
	B	Black	
5. Type of Contact Block Fitted		2-Position	3-Position
	A	1a	----
	B	1b	----
	C	1a1b	1a 0 1a
	2A	2a	----
	2B	2b	----

■ OPERATING HEAD DIMENSIONS

TS2SS สวิตช์ลูกศร




- TS2SS-1-1A,1B @ n/a
- TS2SS-1-1C @ n/a
- TS2SS-1-2A,2B @ n/a
- TS2SS-2-2A @ n/a
- TS2SS-3-2A @ n/a
- TS2SS-4-2A @ n/a
- TS2SS-5-2A @ n/a



TS2SH สวิตช์ลูกศร



- TS2SH-1-1A,1B @ n/a
- TS2SH-1-1C @ n/a
- TS2SH-1-2A,2B @ n/a
- TS2SH-2-2A @ n/a
- TS2SH-3-2A @ n/a
- TS2SH-4-2A @ n/a
- TS2SH-5-2A @ n/a

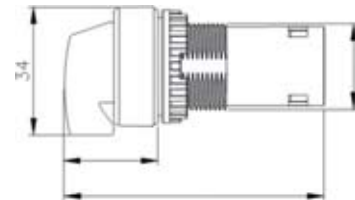

■ SELECTOR SWITCH 2-POSITIONS CONTACT ARRANGEMENT

■ SELECTOR SWITCH 3-POSITIONS CONTACT ARRANGEMENT

Type	TS2-A	TS2-B	TS2-C	TS2-2A	TS2-2B																																				
Contact	1a	1b	1a1b	2a	2b																																				
Contact Arrangement	 <table border="1"> <tr><td>Contact</td><td>0</td><td>1</td></tr> <tr><td>3-4</td><td></td><td>X</td></tr> </table>	Contact	0	1	3-4		X	 <table border="1"> <tr><td>Contact</td><td>0</td><td>1</td></tr> <tr><td>1-2</td><td>X</td><td></td></tr> </table>	Contact	0	1	1-2	X		 <table border="1"> <tr><td>Contact</td><td>0</td><td>1</td></tr> <tr><td>1-2</td><td>X</td><td></td></tr> <tr><td>3-4</td><td></td><td>X</td></tr> </table>	Contact	0	1	1-2	X		3-4		X	 <table border="1"> <tr><td>Contact</td><td>0</td><td>1</td></tr> <tr><td>3-4</td><td></td><td>X</td></tr> </table>	Contact	0	1	3-4		X	 <table border="1"> <tr><td>Contact</td><td>0</td><td>1</td></tr> <tr><td>1-2</td><td>X</td><td></td></tr> <tr><td>1-2</td><td>X</td><td></td></tr> </table>	Contact	0	1	1-2	X		1-2	X	
Contact	0	1																																							
3-4		X																																							
Contact	0	1																																							
1-2	X																																								
Contact	0	1																																							
1-2	X																																								
3-4		X																																							
Contact	0	1																																							
3-4		X																																							
Contact	0	1																																							
1-2	X																																								
1-2	X																																								

Type	TS2-C												
Contact	1a 0 1a												
Contact Arrangement	 <table border="1"> <tr><td>Contact</td><td>1</td><td>0</td><td>2</td></tr> <tr><td>3-4</td><td>X</td><td></td><td></td></tr> <tr><td>3-4</td><td></td><td></td><td>X</td></tr> </table>	Contact	1	0	2	3-4	X			3-4			X
Contact	1	0	2										
3-4	X												
3-4			X										